

ECONOMICAL REMOTE MANUAL PULSE GENERATOR



EHDW-B~C SERIES:

Suitable application for CNC machine by providing HOME position, stop adjustment and interruption signal.

FEATURE:

- Compatible with NHDW-AX SERIES function
- One micro switch option for application
- One center LED lamp for application
- Multi-axes select (max 11 axes)
- Back covering with magnet
- Dust & water proof.(IP65)
- Easy to install
- Easy to handle
- Low cost solution
- OEM Welcome


EHDW-B~C SERIES ORDERING INFORMATION

ORDERING INFORMATION :

EHDW	B	A	4	S	I																																																																																					
SERIES NAME	MODEL	TYPE	STEPS NUMBER	CABLE LENTH	LED LAMP																																																																																					
EHDW	<table><tr><th>MODEL</th><th colspan="2">OPTIONAL</th></tr><tr><th></th><th>R O X</th><th>P R I</th></tr><tr><td>B</td><td>●</td><td></td></tr><tr><td>C</td><td>●</td><td>●</td></tr></table>	MODEL	OPTIONAL			R O X	P R I	B	●		C	●	●	<table><tr><th rowspan="2">TYPE</th><th colspan="3">SPECIFICATION</th></tr><tr><th>DC POWER</th><th>PULSE</th><th>OUTPUT TYPE</th></tr><tr><td>A</td><td>5V</td><td>100PPR</td><td>R330</td></tr><tr><td>B</td><td>5V</td><td>25PPR</td><td>R2K</td></tr><tr><td>C</td><td>12V</td><td>100PPR</td><td>R2K</td></tr><tr><td>D</td><td>12V</td><td>25PPR</td><td>R2K</td></tr><tr><td>E</td><td>5V</td><td>100PPR</td><td>DIFF</td></tr><tr><td>F</td><td>5V</td><td>25PPR</td><td>DIFF</td></tr><tr><td>G</td><td>24V</td><td>100PPR</td><td>R2K</td></tr><tr><td>H</td><td>24V</td><td>25PPR</td><td>R2K</td></tr></table>	TYPE	SPECIFICATION			DC POWER	PULSE	OUTPUT TYPE	A	5V	100PPR	R330	B	5V	25PPR	R2K	C	12V	100PPR	R2K	D	12V	25PPR	R2K	E	5V	100PPR	DIFF	F	5V	25PPR	DIFF	G	24V	100PPR	R2K	H	24V	25PPR	R2K	<table><tr><th>NUMBER</th><th>ROTARY SWITCH STEPS</th></tr><tr><td>2</td><td>2AXES</td></tr><tr><td>3</td><td>3AXES</td></tr><tr><td>4</td><td>4AXES</td></tr><tr><td>A</td><td>BIN 3AXES</td></tr><tr><td>B</td><td>BIN 4AXES</td></tr><tr><td>C</td><td>BIN 5AXES</td></tr><tr><td>D</td><td>BIN 6AXES</td></tr><tr><td>E</td><td>BIN 7AXES</td></tr><tr><td>F</td><td>BIN 8AXES</td></tr><tr><td>G</td><td>BIN 9AXES</td></tr><tr><td>H</td><td>BIN10AXES</td></tr><tr><td>I</td><td>BIN11AXES</td></tr></table>	NUMBER	ROTARY SWITCH STEPS	2	2AXES	3	3AXES	4	4AXES	A	BIN 3AXES	B	BIN 4AXES	C	BIN 5AXES	D	BIN 6AXES	E	BIN 7AXES	F	BIN 8AXES	G	BIN 9AXES	H	BIN10AXES	I	BIN11AXES	<table><tr><th>CABLE LENTH</th><th></th></tr><tr><td>S</td><td>3M</td></tr><tr><td>M</td><td>4M</td></tr><tr><td>L</td><td>5M</td></tr></table>	CABLE LENTH		S	3M	M	4M	L	5M	
MODEL	OPTIONAL																																																																																									
	R O X	P R I																																																																																								
B	●																																																																																									
C	●	●																																																																																								
TYPE	SPECIFICATION																																																																																									
	DC POWER	PULSE	OUTPUT TYPE																																																																																							
A	5V	100PPR	R330																																																																																							
B	5V	25PPR	R2K																																																																																							
C	12V	100PPR	R2K																																																																																							
D	12V	25PPR	R2K																																																																																							
E	5V	100PPR	DIFF																																																																																							
F	5V	25PPR	DIFF																																																																																							
G	24V	100PPR	R2K																																																																																							
H	24V	25PPR	R2K																																																																																							
NUMBER	ROTARY SWITCH STEPS																																																																																									
2	2AXES																																																																																									
3	3AXES																																																																																									
4	4AXES																																																																																									
A	BIN 3AXES																																																																																									
B	BIN 4AXES																																																																																									
C	BIN 5AXES																																																																																									
D	BIN 6AXES																																																																																									
E	BIN 7AXES																																																																																									
F	BIN 8AXES																																																																																									
G	BIN 9AXES																																																																																									
H	BIN10AXES																																																																																									
I	BIN11AXES																																																																																									
CABLE LENTH																																																																																										
S	3M																																																																																									
M	4M																																																																																									
L	5M																																																																																									



EHDW-B~C EXTERNAL DIMENSIONS

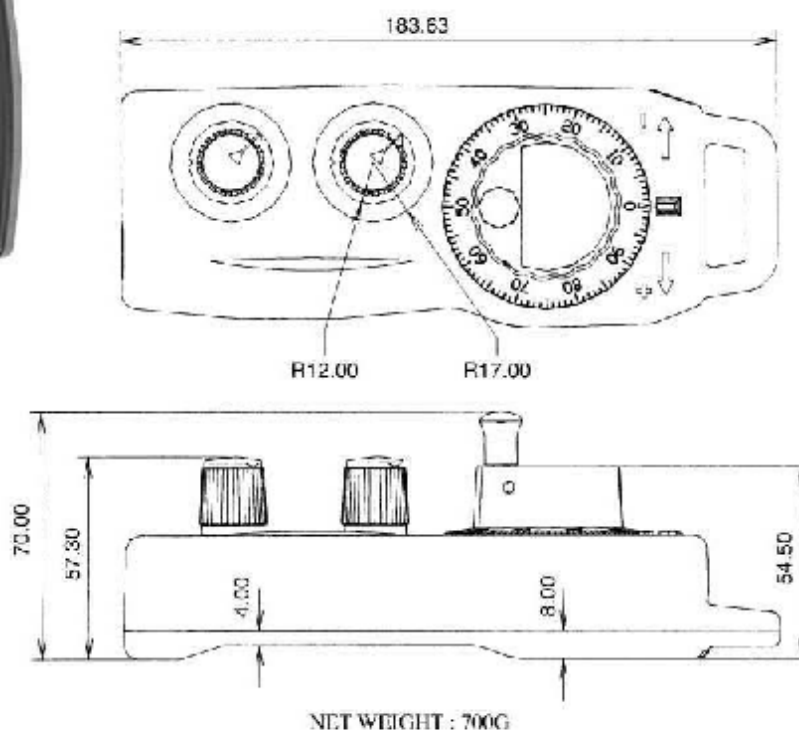

Unit:mm

Distributor: